


Elcometer 134A Chloride Ion Test Kit for Abrasives

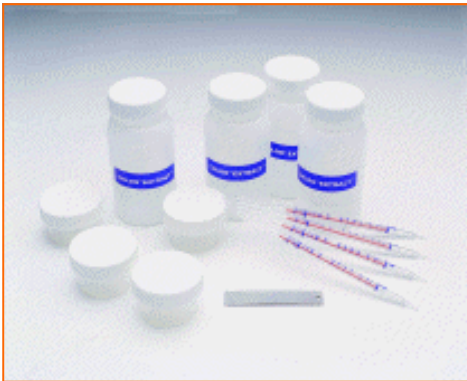

Elcometer 134A Chloride Ion Test Kit for Abrasives

At a glance

- *Fast accurate field test for measuring Chloride content of abrasives or concrete substrates.*

Elcometer 134A Chloride Ion Test Kit for Abrasives

Chlorides deposited on a surface by contaminated abrasive during blasting can cause a coating to fail prematurely. Contamination can build up - particularly if the blast media is recycled several times.

The Elcometer 134A is an easy to use, accurate field test which allows you to determine if your abrasive is contaminated with chlorides and thus prevent costly surface related failures.

Chloride Ion testing can now be achieved quickly and accurately using a novel extraction method, based on the CHLOR*EXTRACT™ solution

The Elcometer 134A is also an ideal test kit for determining the chloride content of concrete - simply drill a hole into the concrete, collect the waste material and test in the same way.

Surface Cleanliness

Surface contamination from salts such as chlorides, sulphates and nitrates have been shown to lead to blistering of organic coatings, particularly in immersion conditions.

It is not sufficient to measure the cleanliness of the substrate. In a multi-layer coating process, it is necessary to monitor and record the cleanliness of each layer prior to applying the next coating. When using amine cured epoxy coatings, for example, in low ambient temperatures or in high humidity, a surface oiliness or exudate may cause inter-coating adhesion failure.

Can be used in accordance with:	
BS EN ISO 11127-6	BS EN ISO 11127-7
BS 7079-F16	BS 7079-F17

Measuring Range	3 – 50ppm (µg/cm ²)
Scale Resolution	1ppm
Sampling Time	1.5 minutes
Tests per Box	4
Colour Change	Pink to White
Storage Conditions	25°C (77°F)
Kit Weight	367g (13oz)
Kit Dimensions	185 x 125 x 110mm (7 x 5 x 4.5")
Part Numbers	E134----2

The Elcometer 134 units do not require the use of needles or contain mercury.

Related products



Elcometer 134S

Chloride salts left on the surface before the first coat is applied can result in the coating system being forced off the surface by corrosion or blistering before the full life of the coating has been reached. Salts are extracted using a rubber tube and the level of chloride on the surface is identified using a simple glass tube which identifies the concentration level.



Elcometer 134W

Coatings can fail due to chlorides being deposited on a surface by contaminated water during pressure washing, UHP water jetting or wet abrasive blasting. The Elcometer 134W is an easy to use, accurate, field based test which determines if your wash water is contaminated with chlorides and thus prevent costly surface coating failures.



Elcometer 134CSN

Designed to accurately measure surface chloride, sulphate and nitrate ions in minutes, the Elcometer 134 'CSN Salts' offers the user the ability of trouble-free testing in the field. Supplied in an ABS plastic carrying case for easy portability around the site, each field kit is supplied with full instructions attached to the inside lid.



Elcometer 138

Well known in the protective coatings field, the Bresle Patch is one of the most popular tests for soluble salts. A patch is adhered to the substrate and the soluble salts are dissolved into distilled water using a rinsing motion caused by a syringe. A conductivity meter is then used to calculate the slat level.



Elcometer 139

The first site test for determining the presence of Amines on the surface of a coating. If present it can lead to inter-coat adhesion failure. This simple test takes seconds to undertake and gives instant results.

ENGLAND

Elcometer Instruments Ltd
Edge Lane
Manchester M43 6BU

Tel: +44 (0) 161 371 6000
Fax: +44 (0) 161 371 6010
e-mail: sales@elcometer.com
www.elcometer.com

USA

Elcometer Instruments Inc
1893 Rochester Industrial Drive
Rochester Hills Michigan 48309

Tel: +1 248 650 0500
Toll free: 800 521 0635
Fax: +1 248 650 0501
e-mail: inc@elcometer.com
www.elcometer.com

CANADA

Elcometer Canada Ltd
PO Box 622, 401 Ouelette Avenue
Windsor, Ontario N9A 6N4

Tel: +1 248 650 0500
Toll Free: 800 521 0635
Fax: +1 248 650 0501
e-mail: ca_info@elcometer.com
www.elcometer.com

ASIA & THE FAR EAST

Elcometer (Asia) Pte Ltd
896 Dunearn Rd
Sime Darby Centre #3-09
Singapore 589472,
Republic of Singapore

Tel: +65 6462 2822
Fax: +65 6462 2860
e-mail: asia@elcometer.com
www.elcometer.com

BELGIUM

Elcometer SPRL
Rue Vallée 13
B-4681 Hermalle /s Ardenteau

Tel: +32 (0)4 379 96 10
Fax: +32 (0)4 374 06 03
e-mail: be_info@elcometer.be
www.elcometer.be

FRANCE

Elcometer SARL
BP 8-Bou
60 Rue de la Petite Levée
45430 Chécy

Tel: +33 (0)2 38 86 33 44
Fax: +33 (0)2 38 91 37 66
e-mail: fr_info@elcometer.fr
www.elcometer.fr

GERMANY

Elcometer Instruments GmbH
Himmlingstraße 18
D-73434 Aalen

Tel: +49 (0) 7366 91 92 83
Fax: +49 (0) 7366 91 92 86
e-mail: de_info@elcometer.de
www.elcometer.de